


## Empire - Black-White Aztec

### Product Description

Our stunning Empire carpet is a luxurious yet durable loop pile carpet, suitable for many rooms around the home, especially in those high-traffic areas such as the stairs and hallway! The bold herringbone pattern adds enhanced texture and undeniable style to any decor. The Empire range is composed of 100% polypropylene making for a hardwearing and easy to maintain carpet that also benefits from being bleach cleanable. The solid 5mm pile height paired with industry-leading action backing provides comfort underfoot with thermal and acoustic insulation. Complete with a 3-year wear warranty and 5-year stain warranty, our Empire range provides that much needed peace of mind that this is a carpet that can stand the test of time!

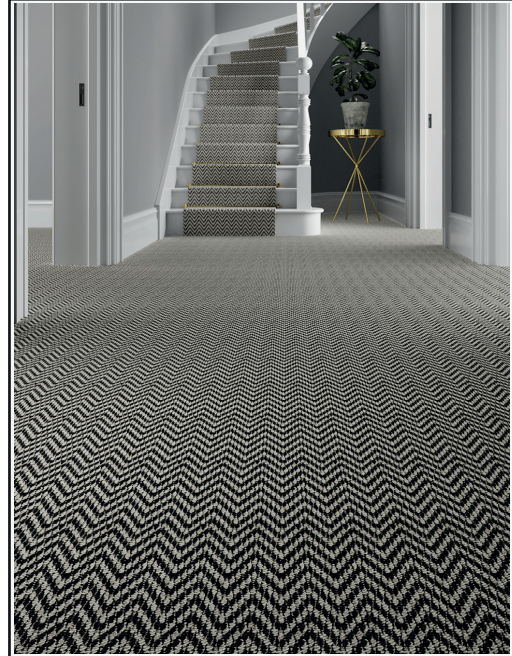

| Range Details        | Properties          | Technical Data       | Technical Specification |
|----------------------|---------------------|----------------------|-------------------------|
| Construction         | 100% Polypropylene  | Fire Certification   | Efl                     |
| Pile Type            | Loop                | Water Fastness       | 4                       |
| Primary Backing      | Woven Polypropylene | Light Fastness       | 5                       |
| Secondary Backing    | Action Backing      | Slip Resistance      | DS                      |
| Pile Height (mm)     | 5mm                 | Machine Guage        | 5/32                    |
| Total Height (mm)    | 7.3                 | Number Of Knots      | 121.320/m2              |
| Pile Weight (gr/m2)  | 840                 | Tog Rating           | 1.3                     |
| Total Weight (gr/m2) | 2050                | Thermal Resistance   | 0.130 m2 K/W            |
| Roll Width (m)       | 4 Metres            | Bleach Cleanable     | Yes                     |
| Pattern Measurement  | 3 X 8cm             | VOC Emissions Rating | Low Emissions           |
| Country of Origin    | Belgium             |                      |                         |

| Installation Guidance            | Properties                             |
|----------------------------------|--|
| Recommended Underlay             | High Density 11mm Underlay             |
| Suitable for Underfloor Heating? | Yes - combined tog must not exceed 2.5 |

### Room Suitability

