


## Herringbone - Golden Oak

### Product Description

The warmth and character of solid oak come to life in this LVT flooring. The tiles measure 2.5mm in thickness and come with a durable 0.55mm wear layer. Made to withstand busy environments with ease, the surface is stain, dent, and scuff resistant as well as easy to clean and to maintain. Thanks to the 102mm x 613mm tiles, you can install this floor in various ways, from classic to parquet-style. Complementing feature strips allow you to enhance the design further. Backed by a 10-year commercial warranty and a 20-year residential warranty, for more peace of mind. We don't recommend laying this product in areas where the temperature will reach 29°C as the product may curl. We also advise that this product be left for 72 hours prior to installation at room temperature.

To complete your purchase and ensure a hard-wearing finish, we recommend using our Impero All-In-One Adhesive.

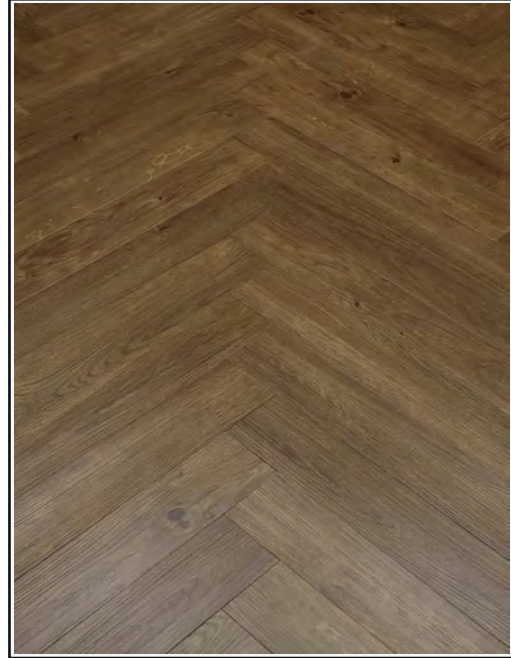

Range Details	Properties	Technical Data	Technical Specification
Construction	Luxury Vinyl Tiles	Fire Certification	Bfl-s1
Species	Oak	Slip Resistance	Class DS
Wear Layer (mm)	0.55mm	Thermal Resistance	0.067 (m <sup>2</sup> K)/W
Edge Profile	Micro Bevel	Water Rating	100% waterproof
Thickness (mm)	2.5m	Staining Resistance	N/A
Board Width (mm)	102mm	Wear Resistance	class 34
Board Length (mm)	613mm	Formaldehyde Rating	Class E1
Pack Coverage	1.25 m <sup>2</sup>	VOC Emissions Rating	Low Emissions
Boards per Pack	20		

Installation Guidance	Properties
Fitting System	Stick
Recommended Adhesive	Impero All-In-One Adhesive
Expansion Gap	6-8mm
Suitable For Underfloor Heating?	Yes

Warranty Type	Years
Residential	20

### Room Suitability

